


AirLiner™ Wireless Slate

Specifications – Model WS100

Physical Specifications

| | |
|---------------------------|--|
| Size | 11" W × 10 1/8" H × 1" D (27.9 cm × 25.7 cm × 2.5 cm) |
| Active Screen Area | 7 3/4" W × 6" H (19.7 cm × 15.2 cm) 9 3/4" (24.8 cm) diagonal |
| Weight | 2 lb. (0.9 kg) |
| Shipping Size | 11 1/2" W × 13 1/4" H × 3 3/4" D (29.2 cm × 33.7 cm × 9.5 cm) |
| Shipping Weight | 4 lb. (1.8 kg) |



All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

| | |
|-----------------------------------|--|
| Software | SMART Board™ software (version 9.1 or later for Windows and version 8.1.4 or later for Mac) and Notebook™ software. Free software upgrades are available at www.smarttech.com/support/software/index.asp . NOTE: Although the latest versions of SMART Board software and Notebook software work with the Windows® 98 and Windows NT® 4.0 (SP6) operating systems, the AirLiner wireless slate requires the Windows 2000 or Windows XP operating system. As well, SMART Board software and Notebook software work with several versions of the Mac OS X operating system, but the AirLiner wireless slate requires Mac OS X version 10.3.3 or later. |
| Communication Interface | Bluetooth™ wireless technology using HID protocol |
| Electromagnetic Technology | Allows you to rest your hand and write naturally on the transparent overlay, without interfering with the electronic ink |
| Maximum Report Rate | 100 points per second |
| Coordinate Resolution | 2032 lpi (80 lpmm) |
| Bluetooth Adapter | Class 2 adaptor allows wireless connectivity with an expected range of 52' (15.9 m) and a maximum range in free space of 164' (50.0 m) |
| Underlay and Icon Strip | Allows you to switch between the eraser, electronic ink colors (black, blue, red and green), right-mouse click, floating keyboard, screen capture and Control Panel |
| Anti-Slip Feet | Four anti-slip rubber feet keep the AirLiner wireless slate stable when working on flat surfaces |
| Buttons | Two programmable buttons default to launching Floating Tools and Notebook software |
| Pen | Battery-free tethered pen. +/- 0.5 mm accuracy with an average reading height of 5 mm. |
| Mouse | Battery-free wireless fingerwheel mouse has continuous rotation, 24 notches per revolution |
| Power Requirements | 6V DC, 450 mA from Class 2 power adapter |
| Power Adapter | Input Voltage: 100V–240V AC, 50 Hz–60 Hz, 0.3 VA Output Voltage: 6V DC, 1.0A |
| Battery | Rechargeable Lithium Polymer battery with 25–30 hours of life per charge, 3.7V, 1800 mAh |
| Certifications | CE, FCC |
| Warranty | Two-year limited warranty |

SMART Board Software 9.5 Computer Requirements

| | |
|--|--|
| Windows Computers | <p>Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 136 MB of free hard disk space for minimum installation (511 MB for full installation with Gallery collections) Windows NT 4.0 (SP6), Windows 98 operating system or later Microsoft® Internet Explorer® 6.0 or later Macromedia® Flash® player version 8</p> <p>NOTE: The AirLiner™ wireless slate requires the Windows 2000 or Windows XP operating system.</p> |
| Requirements for SMART Video Player | <p>Pentium II 450 MHz processor (700 MHz or faster recommended) Windows 98 operating system or later. Does not run on the Windows NT operating system. Microsoft DirectX® technology 8.1 or later</p> |
| Mac Computers | <p>700 MHz processor (1 GHz or faster recommended) 128 MB of RAM (256 MB recommended) Mac OS X versions 10.3.9 and 10.4.x 148 MB of free hard disk space for minimum installation (423 MB for full installation with Gallery collections) Safari™ 1.3.2 or later SMART Board software version 9.5 supports Intel® processors (Universal Binary)</p> <p>NOTE: Previous versions of SMART Board software are compatible with earlier versions of the Mac OS X operating system. To download a previous version of SMART Board software, go to www.smarttech.com/support/software/sb_mac_other.asp.</p> |
| Linux® Computers | <p>Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 185 MB of free hard disk space for minimum installation (460 MB for full installation with Gallery collections) Linux kernel version 2.6 or later X Windows version 11 release 6 (X11R6) or later (must support XRENDER and Xinerama) glibc 2.3.3 (gcc 3.4.2) libstdc++6 Gnome 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE® 10, Red Hat® Enterprise Linux 4 WS or Fedora™ Core 3+</p> |


Storage and Operating Specifications

| | |
|------------------|--|
| Storage | 14°F to 140°F (-10°C to 60°C) with 20–90% humidity, non-condensing |
| Operating | 41°F to 104°F (5°C to 40°C) with 20–80% humidity, non-condensing |

SMART Order Numbers

| | |
|-------------------|---|
| WS100 | AirLiner wireless slate |
| WS100-BNDL | AirLiner wireless slate (when purchased with a SMART Board 600 series interactive whiteboard) |

Dimensions

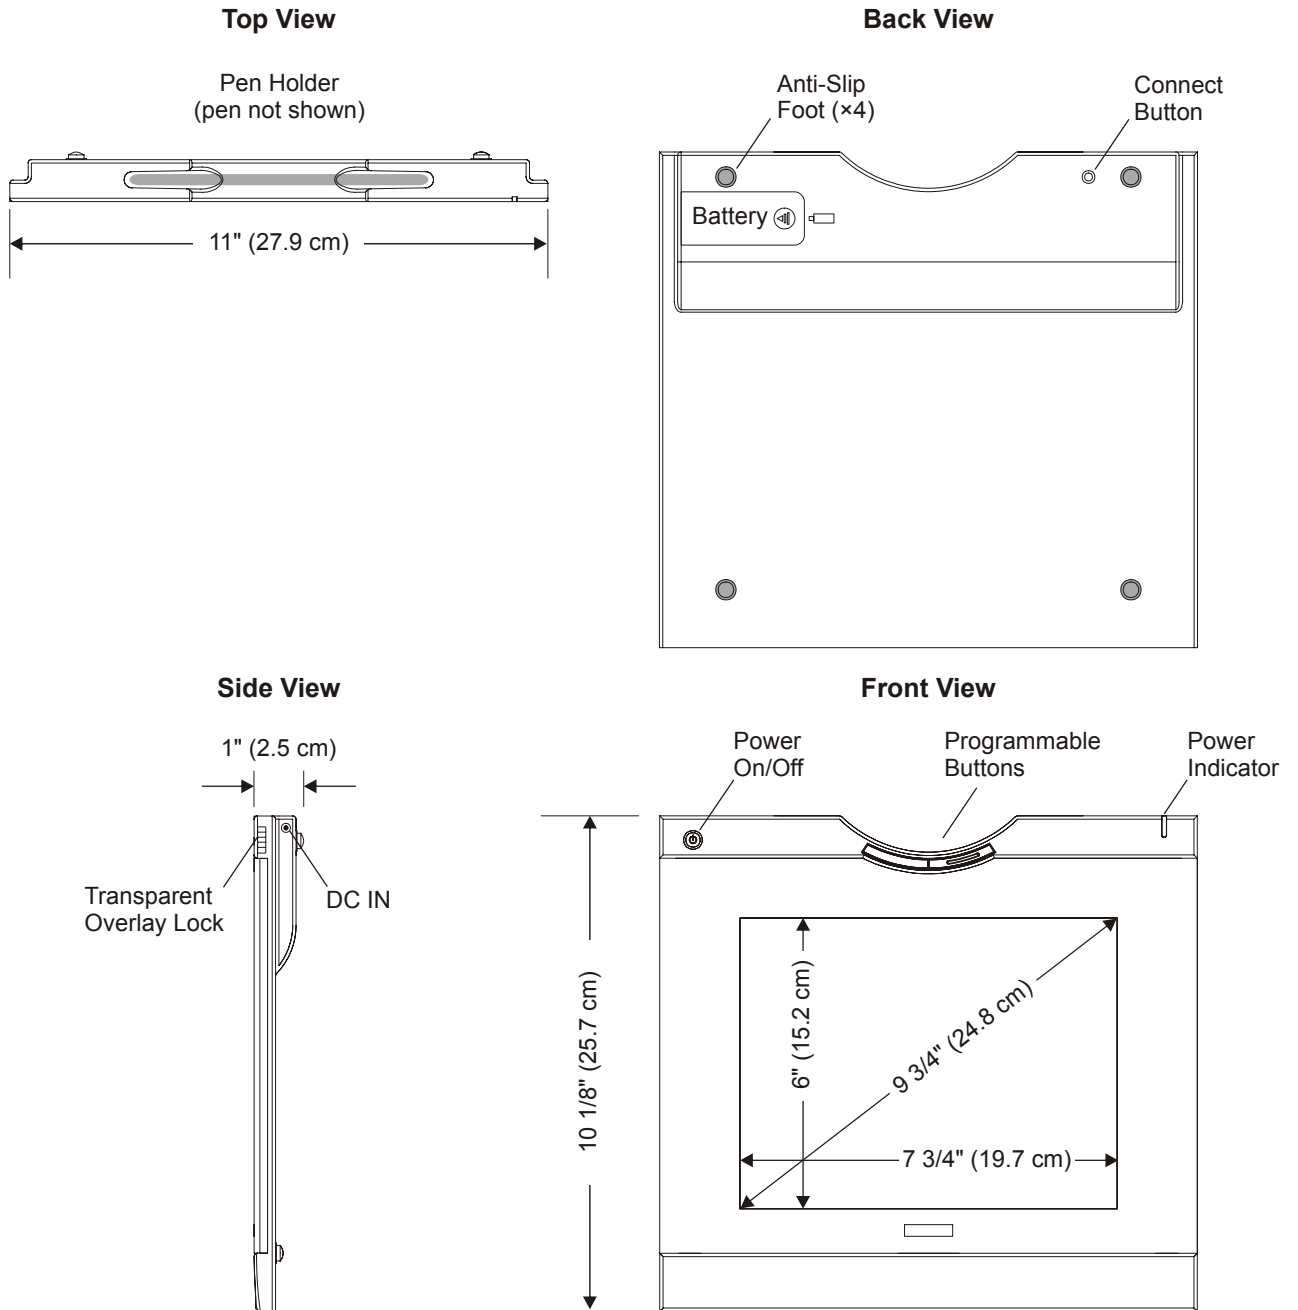

SMART Technologies Inc.
 1207 – 11 Avenue SW, Suite 300
 Calgary, AB T3C 0M5
 CANADA
 Phone +1.403.245.0333
 Toll Free 1.888.42.SMART (Canada/U.S.)
 info@smarttech.com www.smarttech.com

